

## Isolating relay with window contact ETR61NP-230V+FK



1 NO contact not potential free 10A/250V AC.  
 With window contact. Standby loss 0.5 watt  
 only.

For installation.

45 mm long, 55 mm wide, 18 mm deep.

State-of-the-art hybrid technology combines  
 advantages of nonwearing electronic control  
 with high capacity of special relays.

Control input with internally produced low  
 voltage 24 V DC. With an isolating transformer  
 electrically isolated from power supply and  
 make contact (PELV).


Therefore no external low voltage power supply  
 necessary.

With 2 L terminals and 2 N terminals for an  
 easy and quick installation.

Power supply 230V.

**The enclosed window contact** consists of  
 a Reed relay with terminals and a solenoid.  
 The NC contact opens when the solenoid  
 approaches closer than 25 mm. The dis-  
 connection relay ETR61NP is connected to  
 terminals T1 and T2. Power supply to the  
 extractor only cuts in when the window is  
 open. ETR61NP can be wired in the flush  
 mounted socket behind the socket for the  
 extractor.

### Typical connection

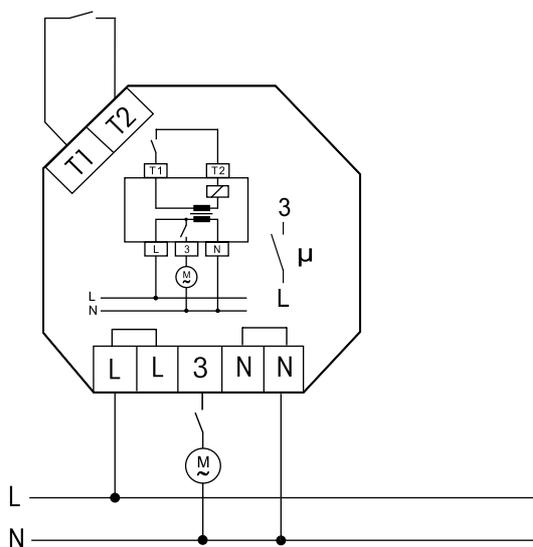

### Mounting the window contact FK:

Lever out the inserts at the narrow end of the  
 housing. Wire up the Reed relay and cut out  
 the cable entry on the housing. Affix the two  
 housings in parallel maximum 15 mm apart  
 and also screw if necessary. In the longitudinal  
 direction the solenoid may be twisted in any  
 direction compared to the Reed relay.

### Technical data

|   |             |
|---|-------------|
| Rated switching capacity                                      | 10A/250V AC |
| Spacing of control connections/<br>contact                    | 6 mm        |
| Inductive load $\cos \varphi = 0.6$                           | 650VA       |
| Incandescent lamp and<br>halogen lamp load <sup>1)</sup> 230V | 2000W       |
| Stand by loss (active power)                                  | 0.5W        |

<sup>1)</sup> For lamps with 150W max.

### Important Note!

**Only skilled electricians may install this  
 electrical equipment otherwise there is  
 the risk of fire or electric shock.**