


Automatic air vent designed for venting of air or gas from heating and chilled water systems.

Technical Specifications

- Body material: Composite/brass.
- Including shut-off valve.
- Minimum/Maximum working temperature: -10 °C / 90 °C.
- Minimum/Maximum working pressure: 0.2 / 6.0 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Suitable for addition of ethanol-based anti-freeze up to 30%.



Description	Flovent R3/8"	
Order Code	27790	
GTIN	08712874277908	
Model	<u>Flovent automatic air vent</u>	
Dimensions	A [mm]	32
	B [mm]	71
	D [mm]	12
	E [mm]	11
	G [mm]	7
	I [mm]	19
Connection (J)	R $\frac{3}{8}$ "	
Shut-off valve	yes	
Weight [g]	75	

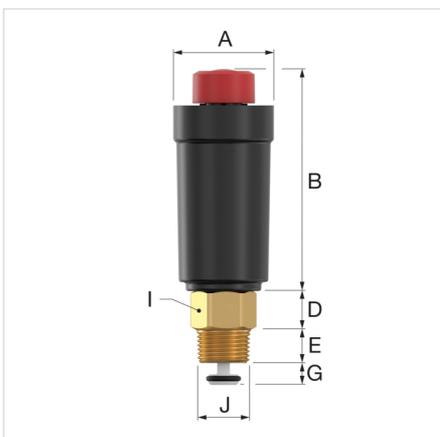

Classification General Data

Etim Group	Measuring and control devices
Etim Class	De-aerator (automatic)
Product Name	Flovent R3/8"
Brand	FLAMCO
Product Type	Flexvent
Order Code	27790
GTIN	08712874277908

Attributes

Housing material	Fibre-reinforced plastic
Material valve	Other
Material float	Other
Nominal diameter	3/8 inch (10)
Outer pipe diameter	17.15 Millimetre
Connection 1	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)
Max. operating pressure at 20 °C	6 Bar
Max. medium temperature (continuous)	90 Degrees celsius
Surface protection	Untreated
Length of connection 1	11 Millimetre
Height	78 Millimetre
Lockable	No
With leakage protection	Yes
With air intake barrier	No
Angle connection	No

Find more information online:[Installation and operating instruction](#)[Statement of Conformity](#)[Packaging data](#)[Flexvent Life Cycle Assessment](#)