

## VOCI DI CAPITOLATO - TECHNICAL FEATURES



Attacchi filettati maschio/femmina.

Maniglia a **leva in nylon**.

Corpo in ottone cromato.

Temperatura minima e massima d'esercizio: 0°C, 90°C.

Attacchi filettati ISO 228

(equivalente a DIN EN ISO 228 e BS EN ISO 228).

Male/female threads.

**Lever handle in nylon**.

Body in chrome-plated brass.


Minimum and maximum working temperatures: 0°C, 90°C.

Threads: ISO 228

(equivalent to DIN EN ISO 228 and BS EN ISO 228).


| MISURE / SIZE               | 1/8" (DN6)     | 1/4" (DN 8)    | 3/8" (DN 10)   | 1/2" (DN 15)   | 3/4" (DN 20)   |
|-----------------------------|----------------|----------------|----------------|----------------|----------------|
| PRESSIONE / PRESSURE        | 15bar/217.5psi | 15bar/217.5psi | 15bar/217.5psi | 15bar/217.5psi | 15bar/217.5psi |
| CODICE / CODE               | 1260018/N      | 1260014/N      | 1260038/N      | 1260012/N      | 1260034/N      |
| NUMERO DI FILETTI / THREADS | 20/280         | 20/420         | 20/420         | 20/280         | 15/150         |

## QUOTE DI INGOMBRO - DRAWING

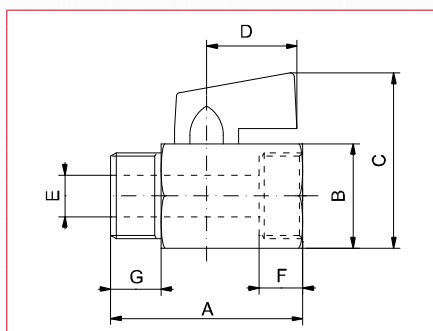

| MISURE / SIZE                                             | 1/8" | 1/4" | 3/8" | 1/2" | 3/4" |
|-----------------------------------------------------------|------|------|------|------|------|
| DN                                                        | 6    | 8    | 10   | 15   | 20   |
| A (mm)                                                    | 40   | 39   | 40   | 45   | 51   |
| B (mm)                                                    | 20   | 21   | 21   | 25   | 30   |
| C (mm)                                                    | 38   | 38   | 38   | 42   | 48   |
| D (mm)                                                    | 22   | 22   | 22   | 22   | 22   |
| E (mm)                                                    | 6    | 8    | 8    | 10   | 13,5 |
| F (mm)                                                    | 10   | 10,2 | 10   | 16,2 | 12,2 |
| G (mm)                                                    | 10   | 9,2  | 10,2 | 12,2 | 14   |
| PRESS. ATMOSF. / WORK. PRESS.<br>kg/cm <sup>2</sup> - bar | 15   | 15   | 15   | 15   | 15   |
| PRESS. ATMOSF. PSI<br>LBS WORK. PRESS                     | 220  | 220  | 220  | 220  | 220  |

## SCHEDA MATERIALI - MATERIALS

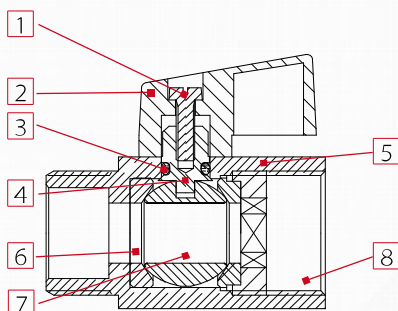

| POS. | DESCRIZIONE/DESCRIPTION      | Q.TÀ/N. | MATERIALE/MATERIAL                          |
|------|------------------------------|---------|---------------------------------------------|
| 1    | Vite / Screw                 | 1       | Fe cromato / hard chrome-plated             |
| 2    | Maniglia leva / Lever handle | 1       | ABS / Abs                                   |
| 3    | Guarnizione / O-ring         | 1       | Or NBR                                      |
| 4    | Asta di manovra / Stem       | 1       | Ottone CW614N / Brass                       |
| 5    | Manicotto / End adapter      | 1       | Ottone CW614N / Brass                       |
| 6    | Guarnizione / Seal           | 2       | P.T.F.E.                                    |
| 7    | Sfera / Ball                 | 1       | Ottone cromato CW614N / Chrome-plated brass |
| 8    | Corpo / Body                 | 1       | Ottone cromato CW614N / Chrome-plated brass |