
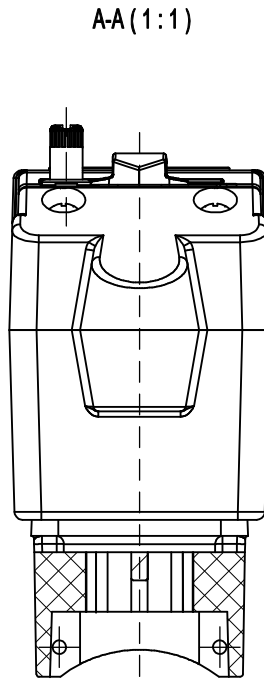
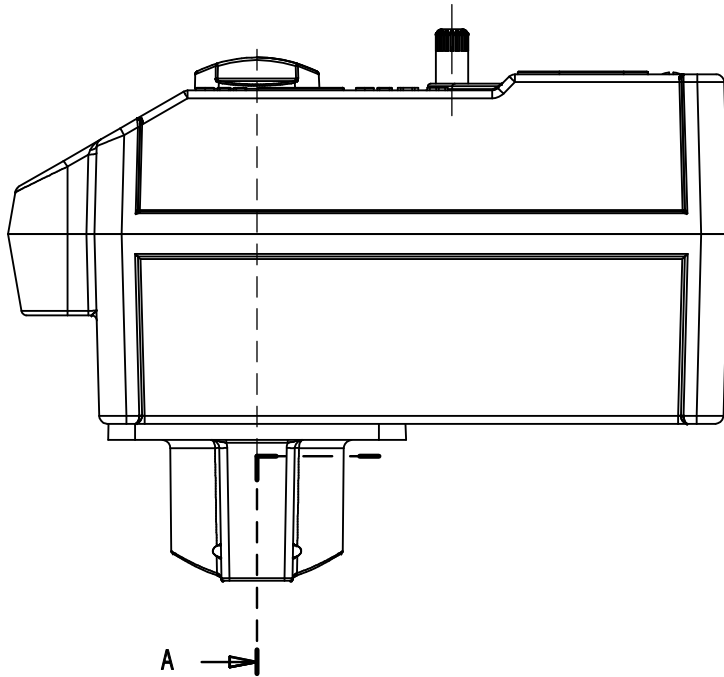
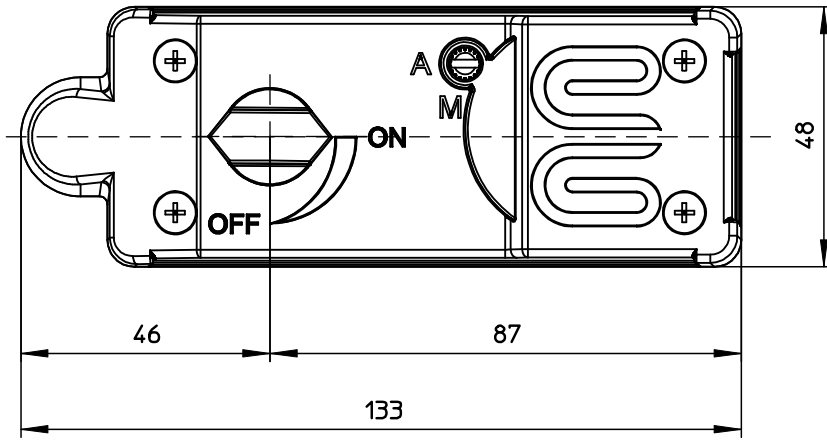
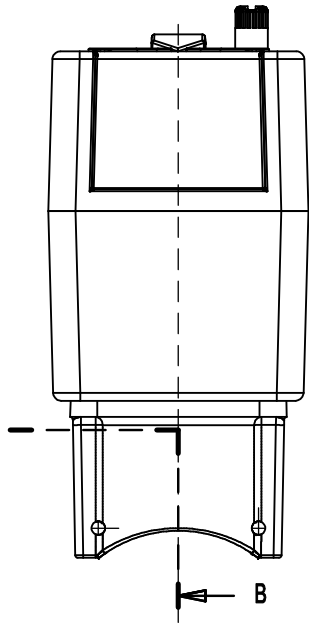


DESTINAZ.: *C.Q.*
DIREZ. TECNICA: *Gobbi Roberto*

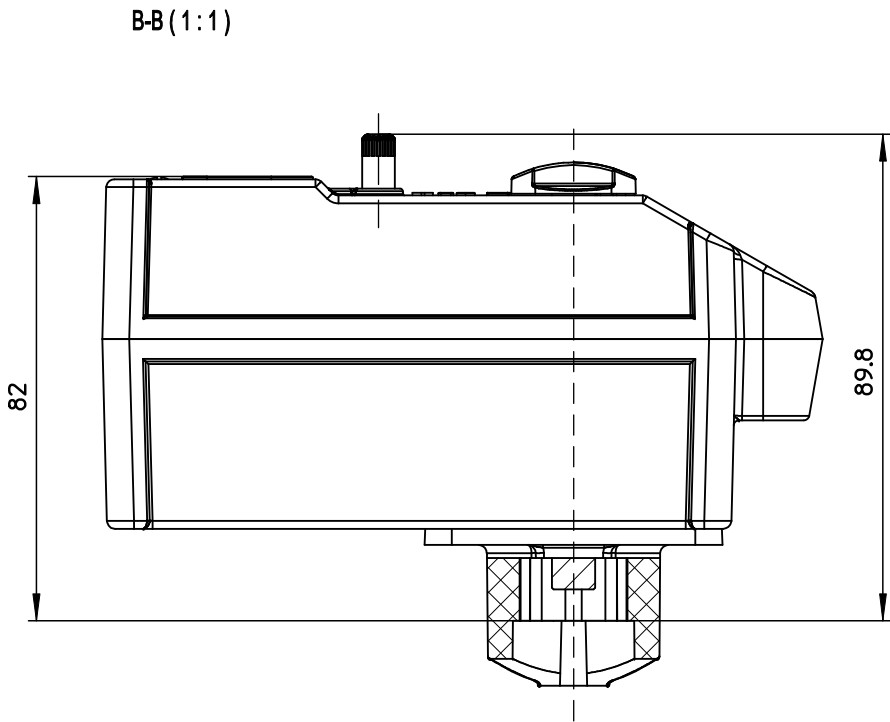

F					
E					
D					
C					
B					
A					
Simb.	Data	N° Modif.	Firma	Approvato	

Sostituisce le:		Tolleranze Generali da applicare:	
Sostituito da:		TOLLERANZE PER LAV. MECCANICHE norma ISO 002 QUOTE $\geq$ 0 30 80 150 250 400 630 1000 1600 2500 4000 6300 10000 mm $\pm$.30 .60 .80 .150 .250 .400 .630 .1000 .1600 .2500 .4000 .6300 .10000 TOLLERANZE mm $\pm$.012 .025 .035 .045 .075 .100 .150 .200 .300 .400 .600 .800 .1200 .1600 .2500 .4000 .6300 .10000	
 Formato A2		Questo disegno non può essere usato in nessun modo, né essere reso noto a terzi, senza previa autorizzazione scritta della ENOLGAS BONOMI S.p.A. This drawing must not be used in any manner unless prior written authority is received from ENOLGAS BONOMI S.p.A.	
 ENOLGAS CONCESSIONE Via Europa, 227 ITALY			

 KROSTIX 32/ ∇ = 0,5 micron (Stampaggio)	Stato:	Designata: ROBERTO GOBBI	
32/ ∇ = 3,2 micron (Tramatura)	Materiale: VARI	Approvato:	
0,8/ ∇ = 0,8 micron (Dimensionale)	Trattamento:	Data: 28/01/10	Scala: 1:1
Particolare: ATTUATORE FLAT QM 230V		Serie: FLAT	
50/60 Hz 2FILI MICRO 60° 15Nm IP54		Misura:	
BIDIREZIONALE AM		N°	S2833P00
		Coef.	