

A


B

C


D

E

F

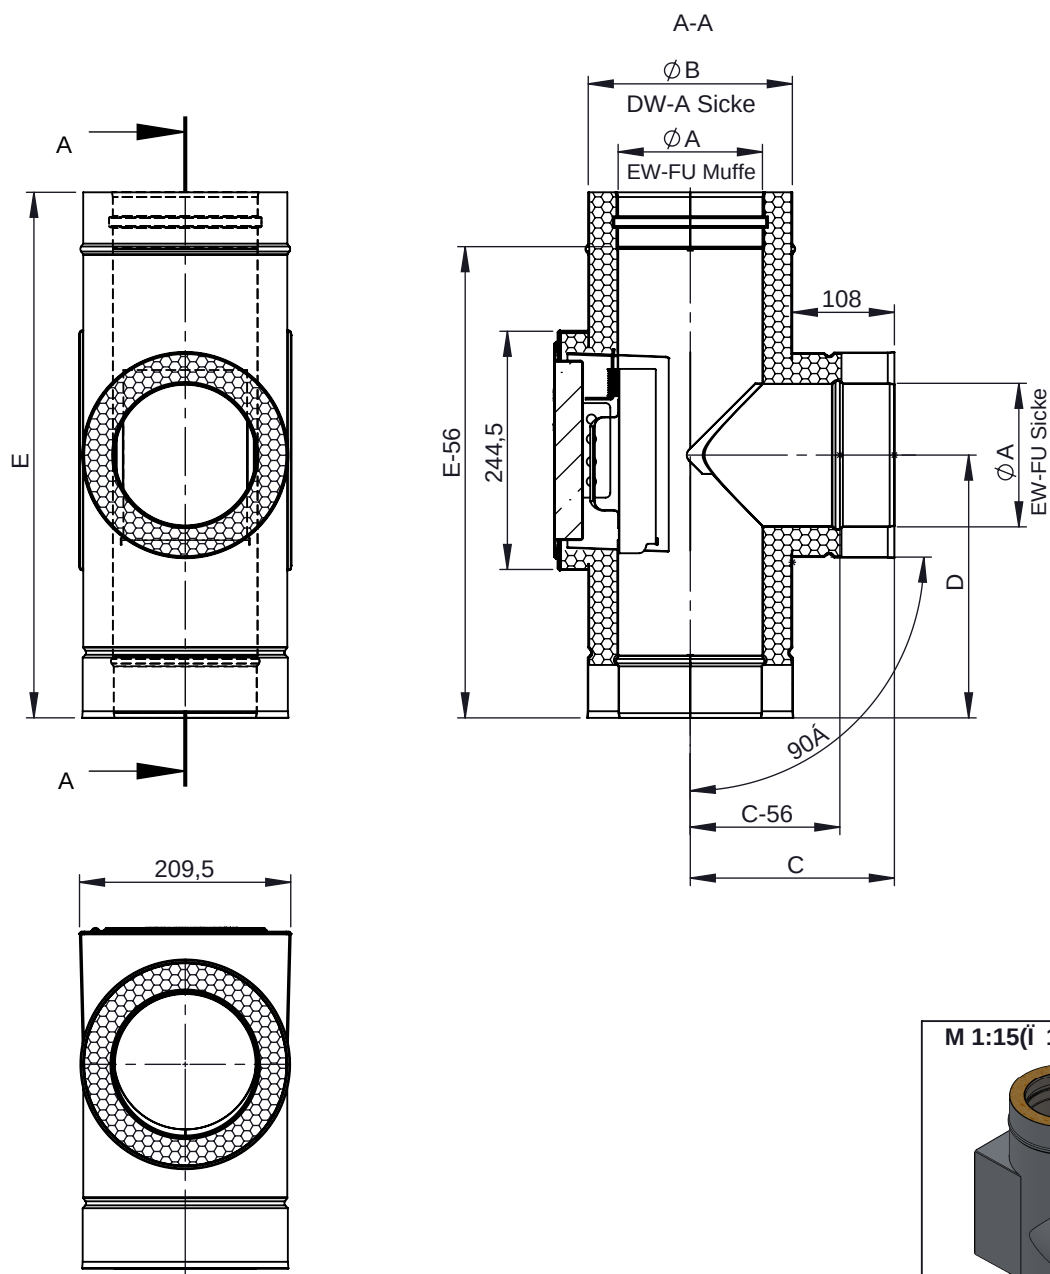

M 1:15(1 150)



inkl. Systemklemmband

$\varnothing$	080	100	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
B	145	165	180	185	195	205	215	225	245	265	280	315	365	415	465	515	565	615	665
C	181	191	199	201	206	211	216	21	231	241	253	266	291	316	341	366	391	416	440
D	278												328		378		428		478
E	556												656		756		856		956
t/t _a	0,6/0,6																		
kg	6,71	7,33	7,8	7,95	8,25	8,5	8,81	8,97	9,51	10,06	10,74	11,43	14,17	15,7	18,96	20,68	24,51	26,45	30,7

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A2

mm / kg

date

24.02.2010

name

FST

checked by

approved by

modified by

07.03.2019

JGR

description

T-Anschluss 90° inkl. Reinigung gegenüberliegend (gleiche H° he)

code

DW-FU 309

drawing-no.

02-20-2201-000

scale

1:10

format

A4

sheet

1 of 1

