


Pure+ Fresh-water storage tank 1000 l with 1 smooth-pipe heat exchanger

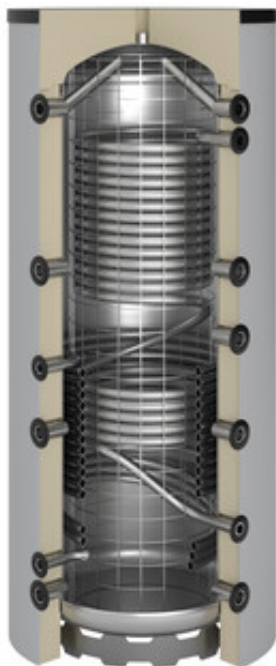

Fresh-water storage tank for highest demands on drinking water hygiene and energy efficiency.

The structure of the storage tank is fundamentally different from usual large-volume domestic hot-water tanks. A built-in corrugated stainless steel pipe separates the drinking water from the heating water, while serving as a powerful heat exchanger at the same time. Thus, the advantages of a buffer tank are combined with those of a continuous flow water heater.

The heating water serves as actual heat storage while the drinking water flows through the corrugated stainless steel pipe only if required and, thus, a legionella-safe domestic water heating is ensured. You do not need a protection programme against legionella in the controller. At all times, the consumer is provided with hygienically clean, fresh water at the desired temperature.

Due to the additional smooth-pipe heat exchanger, a heat generators can be integrated at any time and its energy can be fed into the fresh-water storage tank.

Data pursuant to EU regulation 814/2013

| | |
|---------------------------------------|---|
| Name of supplier's trade marks: | OEG GmbH |
| Model identification of the supplier: | 516005480 - Fresh-water storage tank 1000 l with 1 smooth-pipe heat exchanger |
| Heat retaining losses in watts: | 55 |
| Storage tank volume in litres: | 990 |

General

| | |
|--|------------------------------|
| OEG Nr.: | 516005480 |
| Rated volume according to EN 12897: | 1000 |
| Colour: | silver |
| Insulation according to DIN 4102-1 Fire Protection Class B2: | removable segment insulation |
| Weight [kg]: | 315 |
| Total height including insulation [mm]: | 2350 |
| Diameter without insulation [mm]: | 790 |
| Diameter with insulation [mm]: | 1015 |
| Tilt height [mm]: | 2280 |

Energy

| | |
|--|-------|
| Heat retaining loss according to EN 12897 [W]: | 55 |
| Heat losses in stand-by mode according to DIN 12897 [kW/h / 24 h]: | 1,320 |
| Output capacity (45°C) [l]: | 571 |
| Performance indicator NL following DIN 4708: | 6,40 |

Pure+ Fresh-water storage tank 1000 l with 1 smooth-pipe heat exchanger



Tank

| | |
|--|-----|
| Real volume according to EN 12897 [l]: | 990 |
| p _{max} Tank [bar]: | 3 |
| t _{max} Tank [°C]: | 95 |
| t _{min} Tank [°C]: | 20 |

DHW heat exchanger

| | |
|--|-------|
| DHW heat exchanger area [m²]: | 8 |
| DHW heat exchanger volume [l]: | 34,20 |
| p _{max} DHW heat exchanger [bar]: | 6 |
| t _{max} DHW heat exchanger [°C]: | 95 |

Smooth-pipe heat exchanger

| | |
|--|-------|
| Smooth-pipe heat exchanger [number]: | 1 |
| Smooth-pipe heat exchanger area bottom [m²]: | 3,30 |
| Smooth-pipe heat exchanger volume bottom: | 21,30 |
| p _{max} Smooth-pipe heat exchanger [bar]: | 10 |
| t _{max} Smooth-pipe heat exchanger [°C]: | 130 |

Connections

| | |
|---|-----------|
| Connection layout: | 90° |
| Connection sensor [Ø mm / terminal]: | 6 mm |
| Connection cold / hot water: | Rp 1 1/4" |
| Connection heat generator [thread]: | Rp 1 1/2" |
| Connection heat exchanger [thread]: | Rp 1" |
| Connection heating element [thread]: | Rp 1 1/2" |
| Max. immersion depth of screw-in heater [mm]: | 800 |