


Schwenkverschraubung – Anzugsdrehmoment für die Hohlschraube


Banjo Fittings – Tightening torque of hollow screw

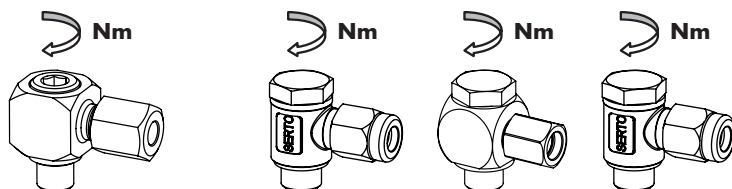


	Stahl Steel		Messing Brass	Edelstahl Stainless Steel	Aluminium
Gewinde Thread			Cu-Dichtung Cu sealing	O-Ring	O-Ring
1/8"	15	20	15	20	10
1/4"	35	50	35	50	20
3/8"	70	100	50	70	30
1/2"	100	160	80	100	40
3/4"	120	180			
1"	150	240			
M5			2	8	
M10x1.0	15	20	10		
M12x1.5	20	25	20	20	
M14x1.5	30	40	30		
M16x1.5	40	55			
M18x1.5	65	80			
M22x1.5	90	110		90	
M26x1.5	110	150			
M33x2.0	180	250			
Typen Types	SO 6096 + METR		SO 42824 + METR SO 42924 SO 43824 + METR SO 43924 SO 47624 SO 47724	SO 52824 + METR SOL 52824	SO 12824

Coudes Banjo – Couple de serrage pour vis creuse

Raccordi Girevole – Coppia di serraggio per vite cava

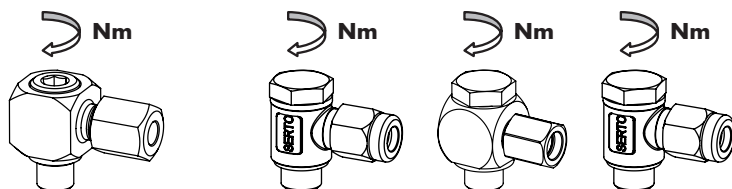

	Acier Acciaio		Laiton Ottone	Acier inox Acciaio inox	Aluminium Aluminio
Filetage Filettatura			Joint en cuivre Guarnizione in rame	O-Ring	O-Ring
1/8"	15	20	15	20	10
1/4"	35	50	35	50	20
3/8"	70	100	50	70	30
1/2"	100	160	80	100	40
3/4"	120	180			
1"	150	240			
M5			2	8	
M10x1.0	15	20	10		
M12x1.5	20	25	20	20	
M14x1.5	30	40	30		
M16x1.5	40	55			
M18x1.5	65	80			
M22x1.5	90	110		90	
M26x1.5	110	150			
M33x2.0	180	250			
Types Tipi	SO 6096 + METR		SO 42824 + METR SO 42924 SO 43824 + METR SO 43924 SO 47624 SO 47724	SO 52824 + METR SOL 52824	SO 12824