

128

3-WAY BALL VALVE



SIZE	PRESSURE	CODE	PACKING
1/4" (DN 8)	55bar/797,5psi	1280014L/T	4/32
3/8" (DN 10)	55bar/797,5psi	1280038L/T	4/32
1/2" (DN 15)	50bar/725psi	1280012L/T	4/32
3/4" (DN 20)	50bar/725psi	1280034L/T	2/16
1" (DN 25)	45bar/652,5psi	1280100L/T	2/16
1" 1/4 (DN 32)	35bar/507,5psi	1280114L/T	2/12
1" 1/2 (DN 40)	35bar/507,5psi	1280112L/T	2/8
2" (DN 50)	35bar/507,5psi	1280200L/T	2/4

TECHNICAL
SPECIFICATIONS

Female/female/female threads.

Lever handle in aluminium.

Body in nickel-plated brass.

Minimum and maximum working temperatures:


-20°C, 150°C in absence of steam.

Threads ISO228

(equivalent to DIN EN ISO 228 and BS EN ISO 228).

MATERIALS


Available with T or L ball.

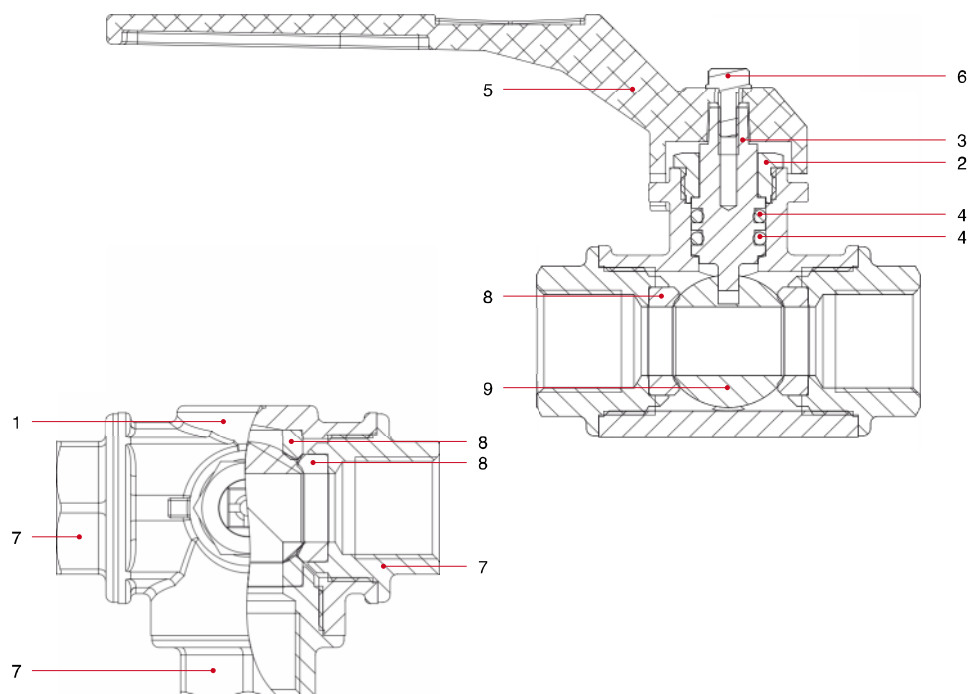

POS.	DESCRIPTION	N.	MATERIAL
1	Body	1	Nickel-plated brass CW617N
2	Packing gland	1	Brass CW614N
3	Stem	1	Brass CW614N
4	O-Ring	2	NBR
5	Lever handle	1	Varnished aluminium EN AB 46100
6	Screw	1	Steel
7	End adapter	3	Nickel-plated brass CW617N
8	Seat	4	PT.FE.
9	Ball	1	Chrome-plated brass CW617N



OVERALL DIMENSIONS

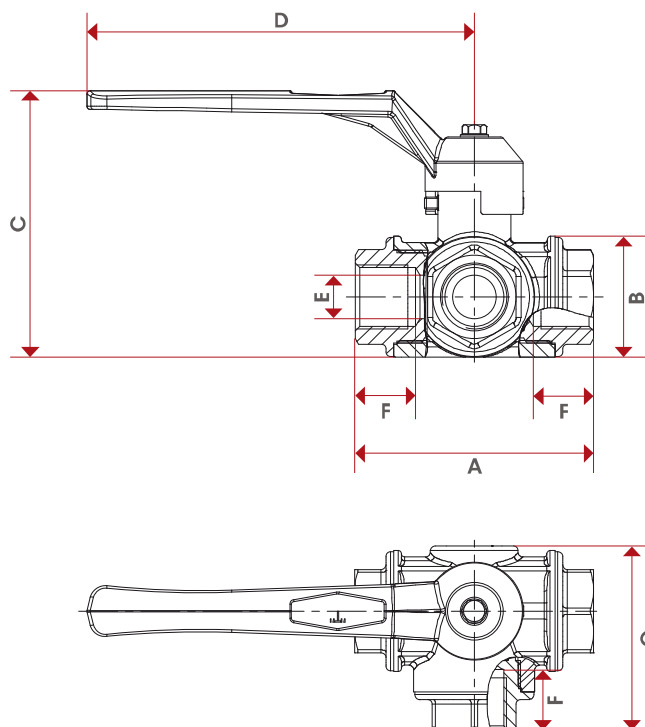

	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	8	10	15	20	25	32	40	50
A	77	77	77	92	104	118,5	138	162
B	39	39	39	47	54,5	64,5	79	93,5
C	86	86	86	107	122,5	132	145,5	186
D	125	125	125	145	170	170	170	260
E	10	12	14	18	23	29	36	45
F	19	19	19	23	25	27	31	36
G	59,5	59,5	59,5	70,5	81	93	108	128
Kg/cm ² bar	55	55	50	50	45	35	35	35
LBS - psi	797,5	797,5	725	725	652,5	507,5	507,5	507,5

CERTIFICATIONS

