


Technical Data Sheet

Product: Frostproof outdoor valve „Frost-Tec“, with sanitary handle and socket spanner, backflow preventer, tube aerator, DVGW-approved

Item number: 00 2810 1550 001 Length adjustment 240mm - 410mm

Technical data:

Medium:	Water
Temperature:	max. 90°C
Operating pressure:	max. 10 bar (PN 10)
Materials:	Body: Brass
	Spindle: Brass
	Sealings: EPDM

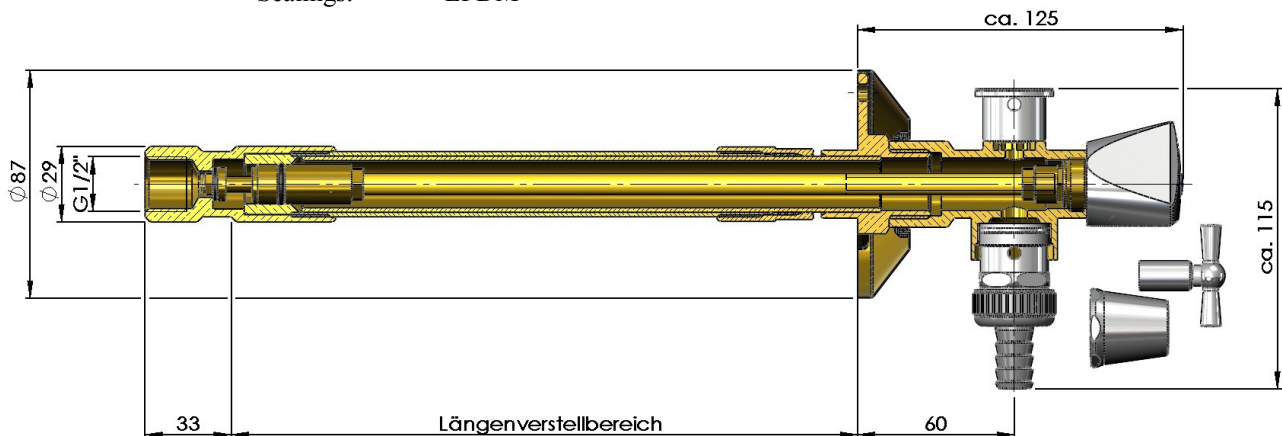

Technical description:

Our „Frost-Tec“ has been developed to avoid damage caused by frost if using outside tapping points.

The „Frost-Tec“ consists of the interior part which is protected from frost (valve with backflow preventer) and the outside part (spout) to open and close the valve. Both parts are connected to each other through a spindle which can be cutted to any required length.

Our „Frost-Tec“ comes with an integrated aerator which makes sure that the valve drains automatically after closing it. Furtheron a second aerator avoids a back suction of water into the pipe system. So the requirements of DIN 1988 part 4 are fulfilled herewith.

There is no need to separately shut off the water supply anywhere else in the house.

„Frost-Tec“ can be adjusted continuously within the three above mentioned adjustment lengths. The product can be used for wall-mounted or built-in installation.

Stand: April 2013
Subject to technical change