

Logis

Single lever manual shower mixer for exposed installation

Surfaces: **chrome** Art. no. : **71600000**



Description

product features

- designed to run 1 outlet
- Connection type: S connections
- Centre distance: 150 mm $\pm$ 12 mm
- Flow rate of hand shower (at 3 bar): 17 l/min
- ceramic cartridge
- Maximum temperature can be adjusted on installation
- non-return valve
- hose connection $\frac{1}{2}$ "
- operating pressure: min. 1 bar / max. 5 bar
- non-thermostatic
- WRAS 1807038
- WRAS 1807038

Article Details

Price excl. VAT

£ 120.00

Certificates


kiwa




Product image



Scale drawing

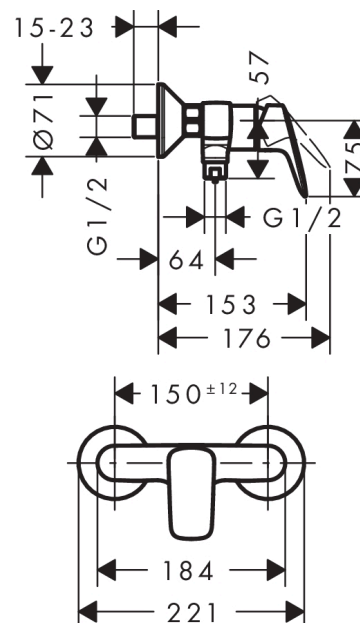

Flowchart

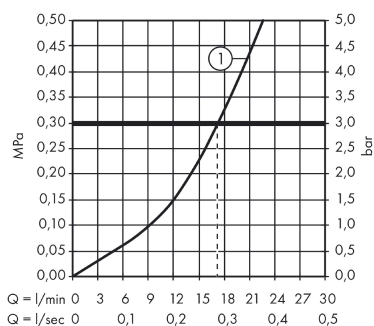

Shower outlet with 1B-resistance