


Reverse+ Fresh-water storage tank with defrosting buffer

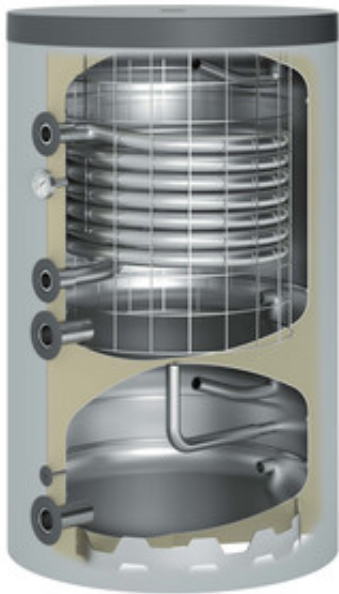

High-quality fresh-water storage tank with buffer unit for heat pump systems intended for hygienic domestic hot water heating in continuous flow principle and the heating or cooling of heating water. The storage tank assumes 2 functions. The fresh water is heated in the upper part of the tank, the lower part buffers the heating return and provides defrosting energy for the heat pump. The isolated structure of both tank areas allows large temperature differences. Therefore, it is possible to simultaneously heat the domestic hot water and to ensure the cooling function of the surface heating by the heat pump in summer. Both tank areas can be retrofitted with separate heating elements.

Data pursuant to EU regulation 812/2013

Name of supplier's trade marks:	OEG GmbH
Model identification of the supplier:	516005900 - Fresh-water storage tank with defrosting buffer
Heat retaining losses in watts:	36
Storage tank volume in litres:	309

General

OEG Nr.:	516005900
Rated volume according to EN 12897:	300
Colour:	silver
Insulation according to DIN 4102-1 Fire Protection Class B2:	solid foamed insulation
Weight [kg]:	115
Total height including insulation [mm]:	1232
Diameter with insulation [mm]:	760
Tilt height [mm]:	1460

Energy

Heat retaining loss according to EN 12897 [W]:	36
Heat losses in stand-by mode according to DIN 12897 [kW/h / 24 h]:	0,864
Output capacity (45°C) [l]:	119
Performance indicator NL following DIN 4708:	1,20

Reverse+ Fresh-water storage tank with defrosting buffer



Tank

Real volume according to EN 12897 [l]:	309
p _{max} Tank [bar]:	3
t _{max} Tank [°C]:	95
t _{min} Tank [°C]:	10
t _{max} Ambient air [°C]:	30
Max. rel. air humidity [%]:	80
Buffer storage tank capacity (part of the actual capacity) [l]:	100

DHW heat exchanger

DHW heat exchanger area [m²]:	2,60
DHW heat exchanger volume [l]:	14,50
p _{max} DHW heat exchanger [bar]:	6
t _{max} DHW heat exchanger [°C]:	95

Connections

Connection layout:	180°
Connection sensor [Ø mm / terminal]:	6 mm
Connection heat generator [thread]:	R 1"
Connection heat exchanger [thread]:	Rp 1"
Connection heating element [thread]:	Rp 1 1/2"
Max. immersion depth of screw-in heater [mm]:	600