

Fax/Email request form

For special storage tanks



Company
 Name
 Customer No.
 Street
 Post code/Town
 VAT ID No.
 Phone
 Fax
 Email
 Date/Signature

Free fax number:
EU 00 800-63 43 29 24

Email:
sales@oeg.net

Dimensions

desired storage capacity l
 max. diameter (without insulation) mm
 max. height mm
 max. tilted height mm

Type of storage tank

- Buffer storage tank
- Fresh-water storage tank with heat exchanger with corrugated stainless steel pipe
- DHW storage tank (enamelled)
- Cold storage tank (external zinc phosphate coating)

Smooth-pipe heat exchanger

(e.g. for the connection of solar systems and other heat sources)
 bottom middle top

Connections


Please enter the desired quantity:

Sockets	Nipples	Pre-welded flanges EN 1092-1/11	
..... Rp ½" R ¾" PN6 DN40
..... Rp 1" R 1" PN16 DN50
..... Rp 1¼" R 1¼" DN65
..... Rp 1½" DN80
..... Rp 2" DN100
..... Rp 3" DN125
	 DN150
Mounting a temperature sensor	 DN200
..... inside Ø 7mm	 DN250
	 DN350

PES fleece insulation and colour of foil cladding

Thermal conductivity 0.036 W/(mk)

50 mm	100 mm				
silver	white	blue	red	anthracite	

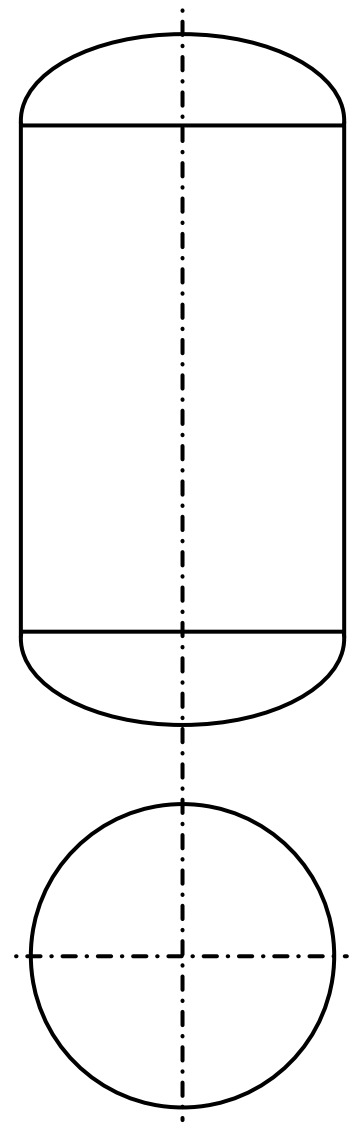

Insulation for cold storage tanks

Armaflex insulation professionally glued.
 Enclosed as cuttings from a tank height of 2,136 mm.

Immersion heaters

..... Heating element in socket Rp 1½" Flange heater in service hatch