
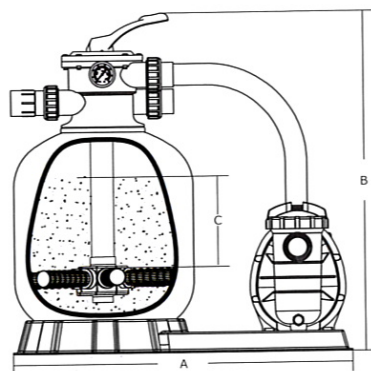


FSF-6W SERIES FILTRATION COMBO

FEATURES

- Fiberglass filter tank
- 6 - way multi-port valve
- Oil pressure gauge

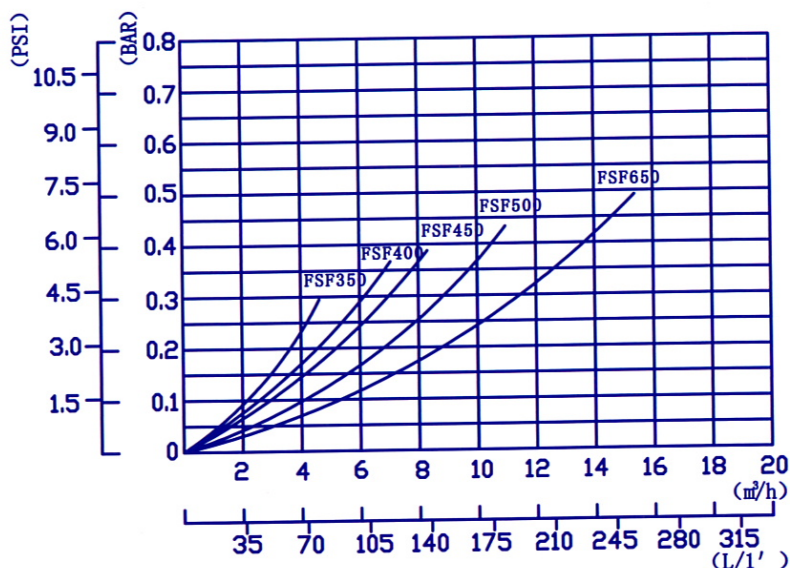

FUNCTIONS: Refer to 6-Way Multi-port Valve

Maximum Working Pressure 250kPa/26psi/2.5bar
 Factory Testing Pressure 400kPa/58psi/4.0bar
 Maximum Water Temperature 43°C(109°F)
 Size of Silica Sand 0.5-0.8mm

TECHNICAL CHARACTERISTICS

Code	Model No	Filter	Pump	Valve Connections	
88032009	FSF350-6W	V350	SS033	1-1/2inch	50mm
88032110	FSF400-6W	V400	SS050	1-1/2inch	50mm
88032211	FSF450-6W	V450	SS075	1-1/2inch	50mm
88032324	FSF500-6W	V500	SC100	1-1/2inch	50mm
88032425	FSF650-6W	V650	SC150	1-1/2inch	50mm

A mm	B mm	C mm	Max Flow Rate		Sand (kg)
555	680	160	72lpm	4.32m³/h	20
760	759	175	108lpm	6.48m³/h	35
760	813	210	135lpm	8.10m³/h	45
760	856	235	185lpm	11.10m³/h	85
760	961	300	260lpm	15.60m³/h	145