


beidseitig Klemmanschluss

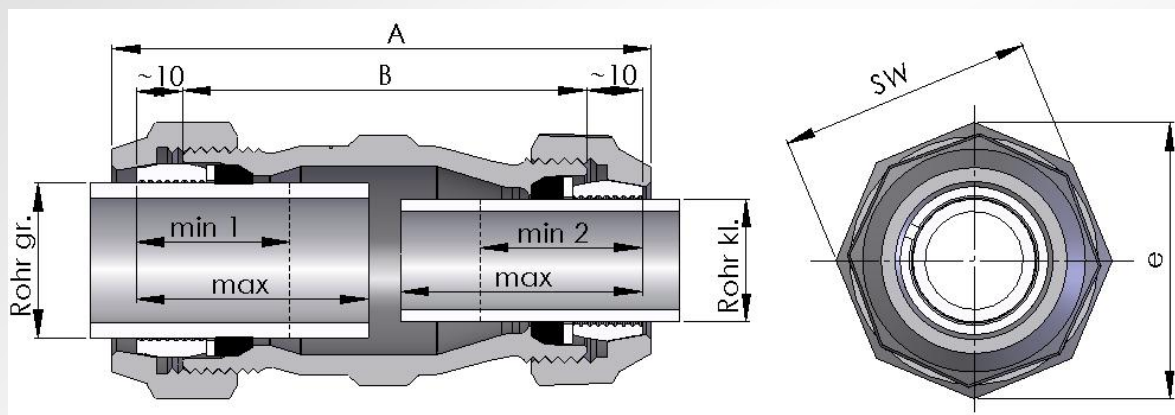

Rohre dürfen nicht aneinander stoßen.

DN	Rohr- Abmessungen [mm]	Gewicht [kg]	~A [mm]	~B [mm]	~SW [mm]	~e [mm]	min 1 [mm]	min 2 [mm]	max [mm]	Artikel Nr.:
Stahl- Rohre nach EN 10255 (DIN 2440, 2441, 2442) und 2448 R1, 2458 R1										
25 x 20	1" x 3/4"	0,8	117	87	55	60	35	30	50	01.150.02.0302
32 x 20	1¼" x 3/4"	1,2	130	100	70	76	40	30	55	01.150.02.0402
32 x 25	1¼" x 1"	1,2	130	100	70	76	40	35	55	01.150.02.0403
40 x 25	1½" x 1"	1,4	130	100	75	81	40	35	55	01.150.02.0503
40 x 32	1½" x 1¼"	1,6	130	100	75	81	40	40	55	01.150.02.0504
50 x 32	2" x 1¼"	2,2	145	115	90	97	40	40	65	01.150.02.0604
50 x 40	2" x 1½"	2,2	145	115	90	97	40	40	65	01.150.02.0605
Siede- Rohre nach DIN 2448 und 2458 R2 bzw. 3										
25 x 20	ø31,8 x ø25,0	0,8	117	87	55	60	35	30	50	02.150.02.31825
32 x 20	ø44,5 x ø25,0	1,2	130	100	70	76	40	30	55	02.150.02.44525
32 x 25	ø44,5 x ø31,8	1,3	130	100	70	76	40	35	55	02.150.02.445318
40 x 25	ø51,0 x ø31,8	1,4	130	100	75	81	40	35	55	02.150.02.51318
40 x 32	ø51,0 x ø44,5	1,6	130	100	75	81	40	40	55	02.150.02.51445
50 x 32	ø57,0 x ø44,5	2,2	145	115	90	97	40	40	65	02.150.02.57445
50 x 40	ø57,0 x ø51,0	2,2	145	115	90	97	40	40	65	02.150.02.5751
Rohr-Kombinationen Stahl-Rohr — Siede-Rohr										
25 x 20	1" x ø25,0	0,8	117	87	55	60	35	30	50	02.150.02.0325
32 x 20	1¼" x ø25,0	1,2	130	100	70	76	40	30	55	02.150.02.0425
32 x 25	1¼" x ø31,8	1,2	130	100	70	76	40	35	55	02.150.02.04318
40 x 25	1½" x ø31,8	1,4	130	100	75	81	40	35	55	02.150.02.05318
40 x 32	1½" x ø44,5	1,6	130	100	75	81	40	40	55	02.150.02.05445
50 x 32	2" x ø44,5	2,2	145	115	90	97	40	40	65	02.150.02.06445
50 x 40	2" x ø51,0	2,2	145	115	90	97	40	40	65	02.150.02.0651
Rohr-Kombinationen Stahl-Rohr— PE-Rohr: siehe Baureihe 154										