


height [mm]	width [mm]	connection distance [mm]	depth [mm]	wall-to-power distance [mm]	weight [kg]	capacity [dm ³]	power [W] 75/65/20
600	300	400/500	140-145	50-55	4,6	4,2	297
600	430	400/500	140-145	50-55	8,6	5,0	426
600	530	500/500	140-145	50-55	10,4	6,2	526
920	430	400/500	140-145	50-55	13,2	7,7	701
920	530	500/500	140-145	50-55	16,3	9,5	865
1200	430	400/500	140-145	50-55	15,8	10,0	838
1200	530	500/500	140-145	50-55	19,6	12,4	1128
1400	430	400	140-145	50-55	18,4	11,6	977
1400	530	500	140-145	50-55	22,8	14,4	1216
1600	430	400	140-145	50-55	21,0	13,2	1116
1600	530	500	140-145	50-55	26,0	16,5	1390

Universal bottom or side connection up to 1200mm height.

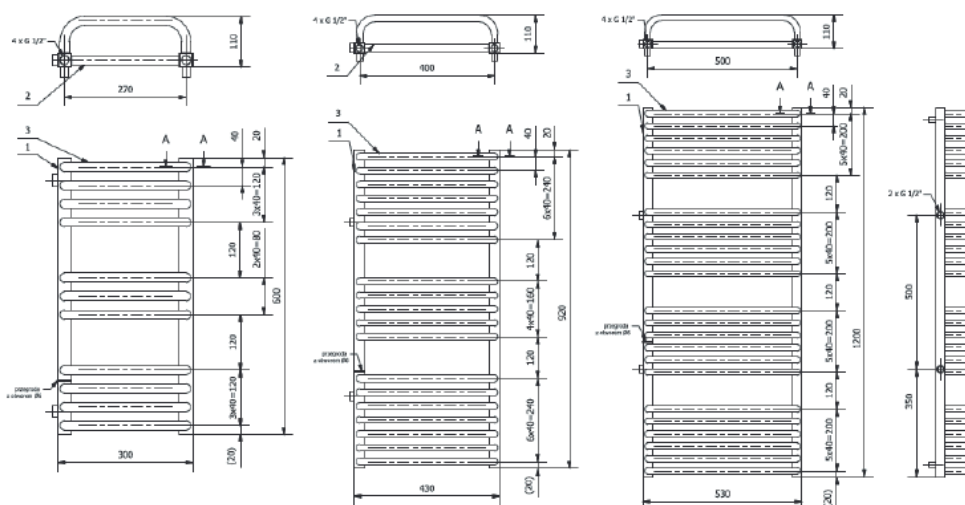


RECOMMENDED VALVES SET

Standard connections



Optional connections

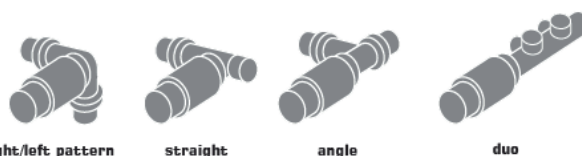

10 bar
Maximum pressure



Water-electric option



Electric option available

Horizontal pipes: oval Ø 34 x 56

Vertical straight pipes: round Ø18 in 2 rows

Detail work: radiator made from low-carbon steel with powder coated finish

Standard colours: white RAL 9003 or anthracite RAL 7016

Colour palette depending on client's preferences: RAL colour system, special colours