


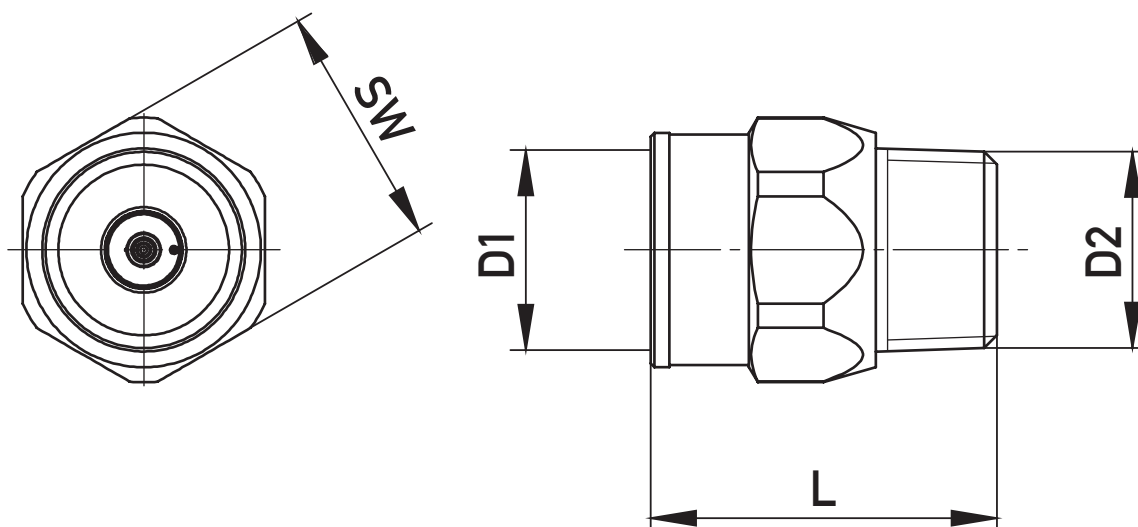

COD.	V _{GAS}	DN	D1	D2	L	SW
GS01220100	2.5	15	R 1/2"	Rp 1/2"	44	27
GS02220200	2.5	20	R 3/4"	Rp 3/4"	46	32
GS02320200	4.0					
GS03220300	2.5					
GS03320300	4.0	25	R 1"	Rp 1"	54	41
GS03420300	6.0					
GS04520400	12.8	32	R 1 1/4"	Rp 1 1/4"	61	50
GS05620500	12.8	40	R 1 1/2"	Rp 1 1/2"	69	60
GS06620600	16	50	R 2"	Rp 2"	75	70

Body: **Steel**
 Surface finishing: **Zinc Plated**
 Seal : **NBR**

TECHNICAL SPECIFICATIONS

reference standard valve:	DVGW VP 305-1 (12-2007)
working pressure:	15-100 mbar
working temperature:	-20 °C +60 °C
pressure drop:	< 0.5mbar
fs.min:	1.30 V_N
fs.max:	1.45 V_N
VL overflow value:	10-30 lt/h at 100mbar (Air)
External heat resistance:	925°C x 60'
Internal heat resistance:	200°C
Connections:	Threaded according to EN 10226-1
fields of use:	for all types of Gas as specified in EN 437 and DVGW G260/1 (methane, butane, propane).



CERTIFIED

according to DVGW VP305-1
DG-4360BP0116



Denominazione / Designation
Excess Flow Valve F/M

Codice / Code
ST_GST01

Rev.
 Data / Date
 02/01/2017