

BIS Knotenketten (DIN 5686)


(K 50 10)



Vorteile und Eigenschaften

- nach DIN 5686
- Material: Stahl
- elektrolytisch verzinkt

Art.Nr.	L	s (mm)	d1 (mm)	F _{a,z} (N)	VPE 1	Einh.	Gew / 1 Einh (g)
0912022	30 m	2,0	28 x 5,0	400	1	m.	87.03
0912025	30 m	2,2	31 x 5,0	500	1	m.	105.03
0912027	30 m	2,5	35 x 6,0	600	1	m.	122.80
0912030	30 m	2,8	39 x 6,0	800	1	m.	159.53
0913032	30 m	3,1	41 x 8,0	1.000	1	m.	203.00

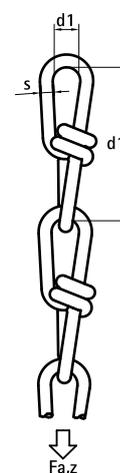

Kombination mit

- BIS S-Haken
- BIS Ketten Notglied
- BIS Sicherheitshaken