2-in-1 Air Nailer/Stapler KNG 40 / 50 SYS D300046







Technical Data	D300046		
Trip mechanism	Single shot with contact safety mechanism		
Air consumption per shot	1,1 I per shot		
Type of staplers	Type 90		
Length of staplers	13-40 mm		
Crown width	5,7 mm		
Type of brad nails	SN		
Length of brad nails	16-50 mm		
Magazine capacity (number of staplers)	100		
Operating pressure	5-8 bar		
Vibration value	2,45 m/s ²		
Sound pressure level (LPA)	82 dB (A)		
Sound power level (LWA)	95 dB (A)		
Dimensions (WxDxH)	248x67x257 mm		
Weight	1,16 kg		

Product description


Fact Sheet

- Users: Carpenters, interior designers, trade fair constructors
- Perfect for mounting of tonque and groove panels, wood ceilings, skirting boards and cornice panels, chip boards, furniture back panels and panelling
- Depth adjustment sets stapler to desired depths conveniently
- · Extra light and handy housing

2-in-1 Air Nailer/Stapler KNG 40 / 50 SYS D300046





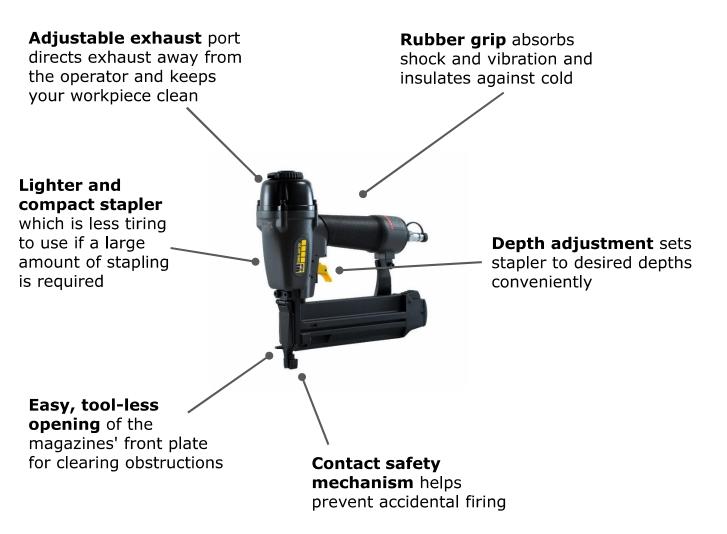

-	مالحب		:		==-	_
FU	rtn	er	INT	orm	atio	1

Scope of delivery	Delivered in Systainer with 1000 brad nails (length: 40 mm), 2000 staplers Type 90 (lenght: 30 mm), hex wrench, goggles, lubricant oil and instruction manual
Warranty	36 months when registrated online 24 months for private (non-commercial) use 12 months for industrial use

DM-P