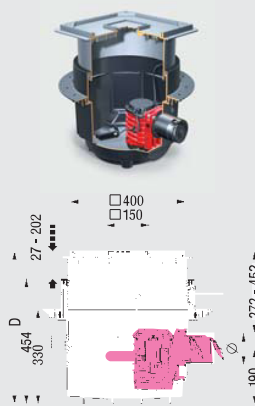

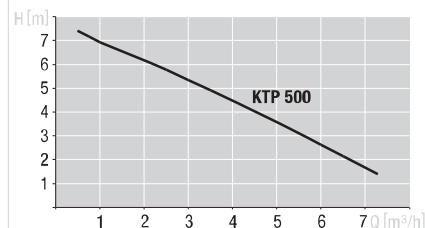


## Basement drains with / without twin flap backwater valve

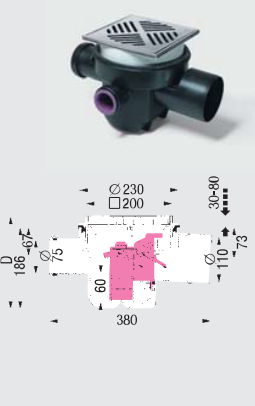

### Pumpfix S

Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>1.6 l/sec flow rate Installation area 700 x 700 mm</p>	<p><b>Backwater pumping station <i>Pumpfix S</i></b> made of polymer <b>for wastewater without sewage</b> <b>Lateral outlet 2.5°,</b> <b>for installation in a concrete slab/floor</b> <b>for installation depth (D) from 481 - 656 mm</b> <b>With removable pump, twin flap backwater valve</b> <b>and odour trap.</b></p> <p>Twin flaps, self-closing, one of which can be locked by hand, self activating pump during backwater, cable length 5 m. With telescopic upper section for height and level adjustments, recessed cover for on-site tiling, class A 15, made of polymer.</p> <p>With moisture protective sealing flange.</p> <p><b>Not for use as a lifting station.</b></p> <p> EN 1253-1 According to EN 13564 Type 5</p>	<p>Ø 110</p>	<p><b>28451</b></p>

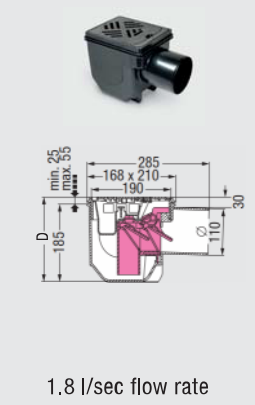


H [m] = Backwater height

### "The Universal"

Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>1.8 l/sec flow rate Installation area 400 x 320 mm</p>	<p><b>Basement drain "The Universal" in PP</b> <b>with odour trap and sludge trap</b></p> <p><b>1 With twin flap backwater valve</b></p> <p><b>2 Without twin flap backwater valve</b></p> <p><input type="checkbox"/> <b>with slotted cover 188 x 188 mm</b> <b>made of polymer, black,</b> <b>class K 3</b> (able to withstand loads up to max. 300 kg). Installation depth (D) 216 - 276 mm</p> <p><input type="checkbox"/> <b>with slotted cover 187 x 187 mm and rim</b> <b>in stainless steel AISI 304, screwed,</b> <b>class L 15</b> (able to withstand loads up to max. 1.5 to). Installation depth (D) 216 - 266 mm</p> <p> EN 1253-1 According to EN 13564 Type 5</p>	<p><b>1</b> Ø 110 <b>2</b> Ø 110</p> <p><b>1</b> Ø 110 <b>2</b> Ø 110</p>	<p><b>27611</b> <b>29111</b></p> <p><b>27621</b> <b>29121</b></p>

### Drehfix

Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>1.8 l/sec flow rate Installation area 320 x 190 mm</p>	<p><b>Basement drain <i>Drehfix</i> in ABS</b></p> <p><input type="checkbox"/> <b>With twin flap backwater valve</b></p> <p><input type="checkbox"/> <b>Without twin flap backwater valve</b></p> <p>with/without removeable twin flap backwater valve and emergency closure which can be locked by hand, odour trap and sludge trap and integrated, height adjustable upper section.</p> <p><b>Lateral outlet 2.5°,</b> <b>Installation depth (D) 210 - 240 mm.</b></p> <p><input type="checkbox"/> <b>with slotted cover 150 x 190 mm</b> <b>made of polymer, black, with Easy Entry Function.</b> <b>Class K 3</b> (able to withstand loads up to max. 300 kg).</p> <p>According to EN 13564 Type 5.</p>	<p>Ø 110 Ø 110</p>	<p><b>27301</b> <b>33101</b></p>