



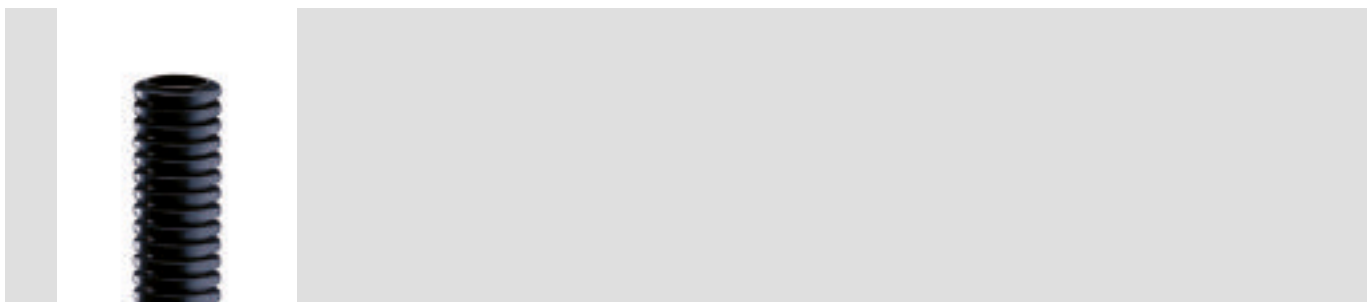

|                                                                 |                                           |                                     |                                                |
|-----------------------------------------------------------------|-------------------------------------------|-------------------------------------|------------------------------------------------|
| Colour                                                          | Black                                     | Material                            | PVC                                            |
| Type                                                            | without cable puller                      | Conduits Ø (mm)                     | 20                                             |
| Glow Wire Test                                                  | 960 °C                                    | Electrocod                          | 2112                                           |
| Resistance to compression                                       | 3 (Medium - 750 N)                        | Resistance to impact                | 3 (Medium - 2 J)                               |
| Resistance to bending                                           | 2 (Pliable)                               | Electrical characteristics          | 2 (With electrical insulating characteristics) |
| Protection against ingress of solid objects without accessories | 0                                         | Protection against ingress of water | 0                                              |
| Resistance against corrosion                                    | Not applicable to plastic conduit systems | Fire resistance                     | 1 (Non-flame propagating)                      |
| Insulation resistance                                           | 100 MΩ a 500V for 1 minute                | Dielectric rigidity                 | 2000 V a 50 Hz for 15 minutes                  |
| Protection against ingress of solid objects with GF coupling    | 4                                         | Standard                            | EN 61386-1 EN 61386-22                         |
| Classification                                                  | 3321                                      |                                     |                                                |

## DIMENSIONAL

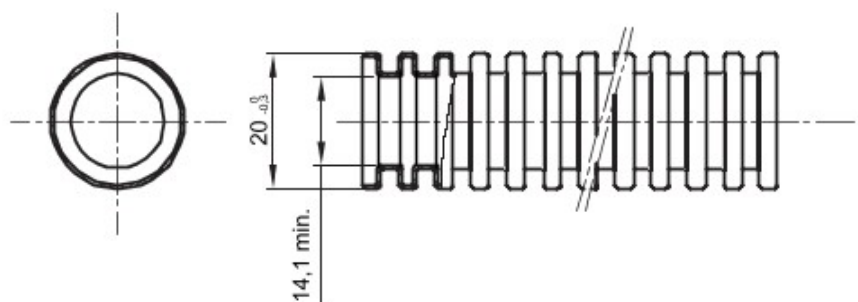

## TECHNICAL SYMBOLOGY



## STANDARDS/APPROVALS

