

0 860 13

## 1. USE


Control mechanisms for rolling shutters, blinds, awnings.  
3 positions: up / stop / down.

## 2. RANGE


Description	Complete	Configurable
Roller blind switch	0 860 13	0 861 13

## 3. DIMENSIONS (mm)

### Complete

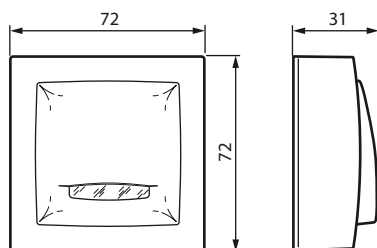

### Configurable



## 4. CONNECTION

Type of terminals: with screws  
Terminals capacity: 2 x 2.5 mm<sup>2</sup>  
Option of two wires per terminal for tapping  
Stripping length: 7 mm  
Screwdriver: Posidrive 1, Philips 1, flat 4 mm.

## 5. TECHNICAL CHARACTERISTICS

### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 31D (complete product)  
Protection against impact: IK 04

### ■ 5.2 Material characteristics


Plate, frame, coverplate: Plastic  
Colour: White RAL 9003  
UV resistant

### Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

### ■ 5.3 Electrical characteristics

Voltage: 250 V~  
Current: 6 AX  
Maximum power on integrated ballast lamps: 100 W  
Frequency: 50 Hz



### ■ 5.4 Climatic characteristics

Use and storage temperature: - 5° C to + 40° C

## 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

## 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.