


Elektroinstallationskanal-System

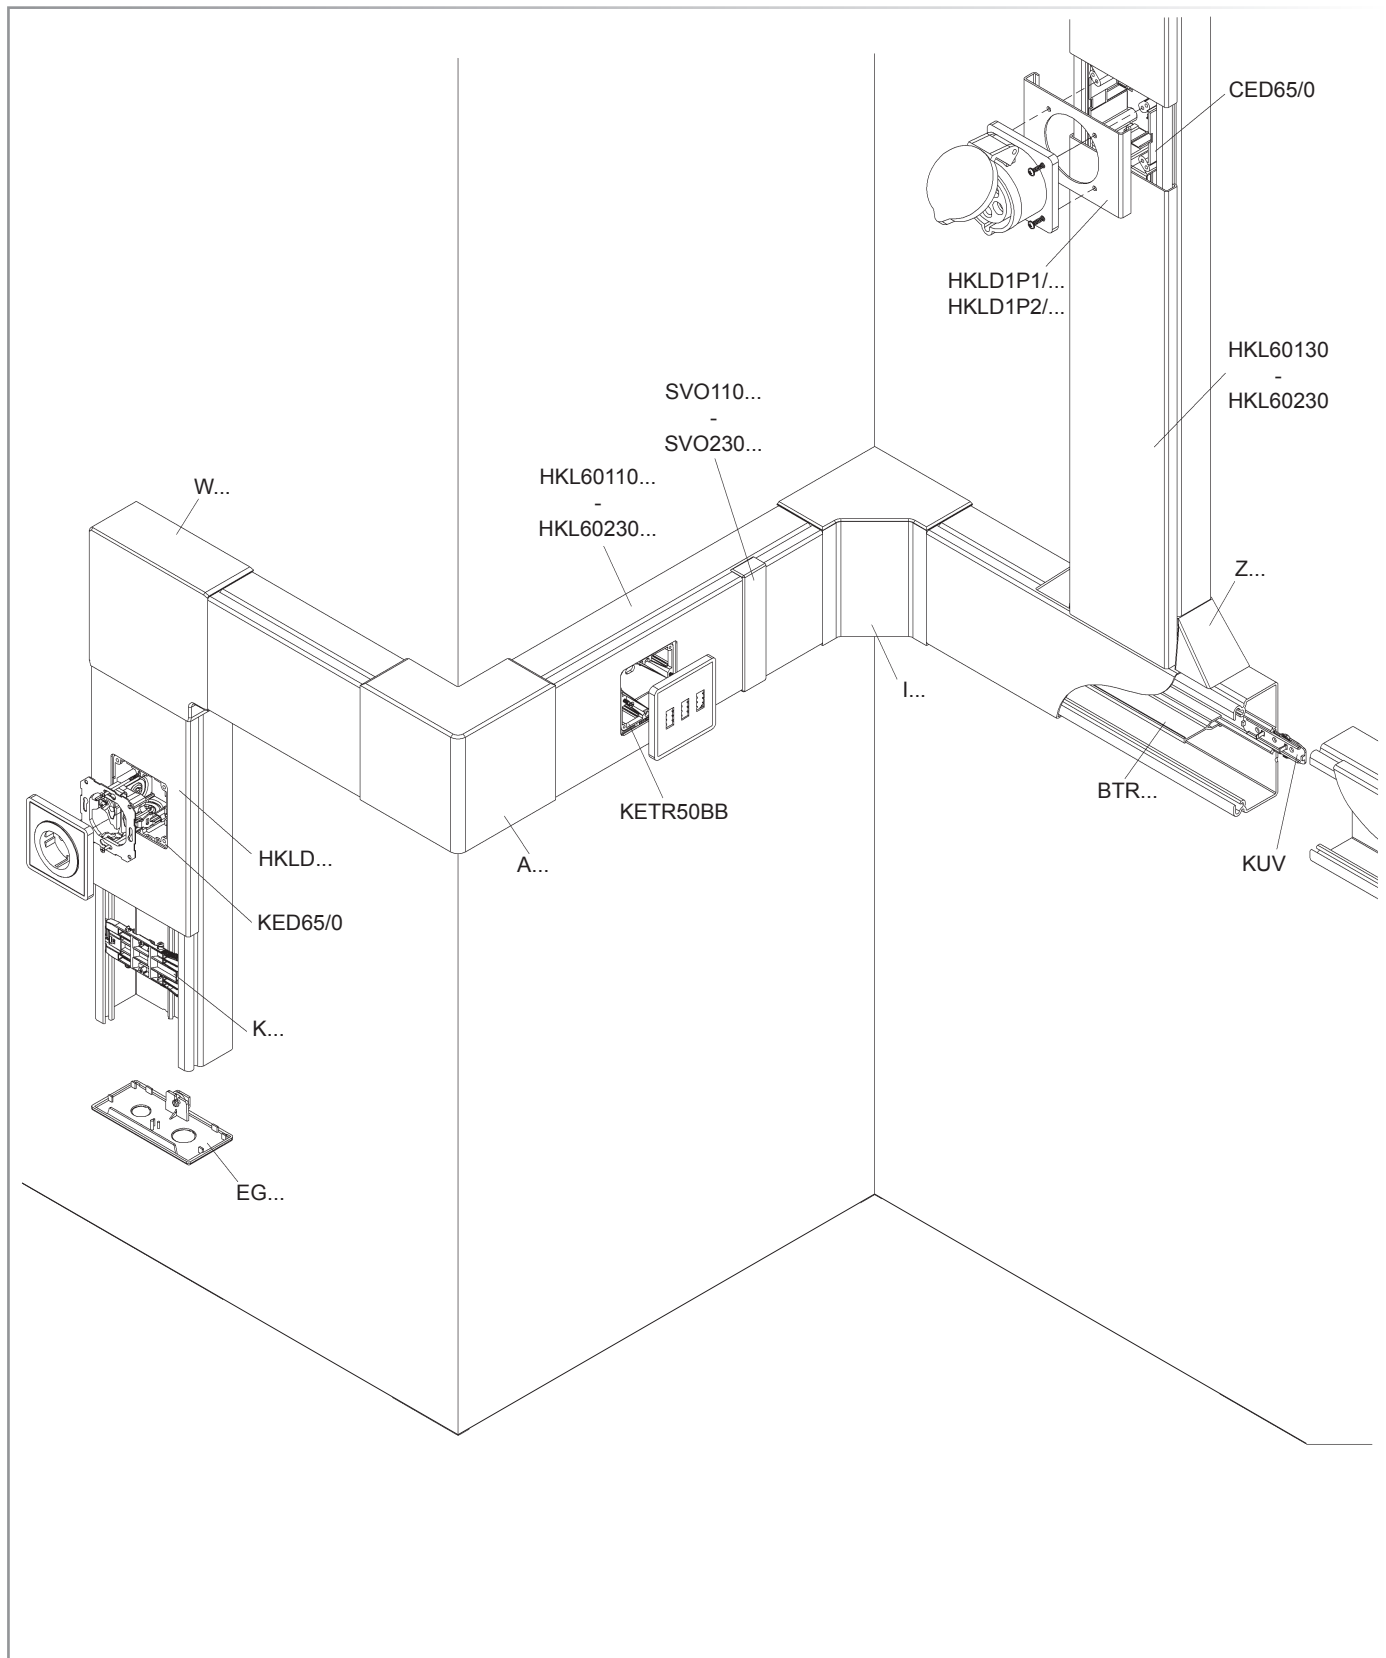

Fassungsvermögen HKL1022 bis HKL6090

	Modell-Nr. K09	RAL	Kabelfassungsvermögen mm ²	Leitungen Ø 10 mm z.B. NYM 3 x 1,5 mm ²		
			gesamt	Kammer I	Kammer II	Kammer III
	↑10 HKL1022	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 125	1 Ltg. Ø 6 mm	-	-
	↑15 HKL1515	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 145	1	-	-
	↑20 HKL2020	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 215	1	-	-
	↑20 HKL2030	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 305 mit Kabelhalteklammer	3	-	-
	↑20 HKL2031	.3 .6 9010 9001	ca. 300 mit Kabelhalteklammer	1	1	-
	↑20 HKL2052	.3 .6 9010 9001	ca. 660	1	1	1
	↑25 HKL2540	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 625 mit Kabelhalteklammer	4	-	-
	↑30 HKL3030	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 660 mit Kabelhalteklammer	6	-	-
	↑40 HKL4040	.1 .3 .5 .6 .8 7030 9010 8014 9001 7035	ca. 1095 mit Kabelhalteklammer	10	-	-
	↑40 HKL4060	.1 .3 .6 .8 7030 9010 9001 7035	ca. 1640 mit Kabelhalteklammer	12	-	-
	↑40 HKL4090	.1 .3 .6 .8 7030 9010 9001 7035	ca. 2410 mit Kabelhalteklammer	16	-	-
	↑60 HKL6060	.1 .3 .6 .8 7030 9010 9001 7035	ca. 2820 mit Kabelhalteklammer	18	-	-
	↑60 HKL6090	.1 .3 .6 .8 7030 9010 9001 7035	ca. 4085 mit Kabelhalteklammer	26	-	-

Fassungsvermögen HKL60110 bis HKL60230

	Modell-Nr. K09	RAL	Ohne Geräteeinbaudose mit Kabelhalteklammer		Mit KETR50BB	
			Lichter Querschnitt ca. mm ²	Leitungen Ø 10 mm z.B. NYM 3 x 1,5 mm ²	Lichter Querschnitt ca. mm ²	Leitungen Ø 10 mm z.B. NYM 3 x 1,5 mm ²
	↑60 HKL60110	.1 .3 .6 .8 7030 9010 9001 7035	ca. 4470	28	ca. 1615	10
	↑60 HKL60130	.1 .3 .6 .8 7030 9010 9001 7035	ca. 5350	34	ca. 2555	16
	↑60 HKL60150	.1 .3 .6 .8 7030 9010 9001 7035	ca. 6305	40	ca. 3200	20
	↑60 HKL60190	.1 .3 .6 .8 7030 9010 9001 7035	ca. 8110	51	ca. 5025	32
	↑60 HKL60230	.1 .3 .6 .8 7030 9010 9001 7035	ca. 9775	62	ca. 7020	44