


Pure+ Fresh-Water storage tank 1,000 litres with 2 smooth pipe heat exchangers

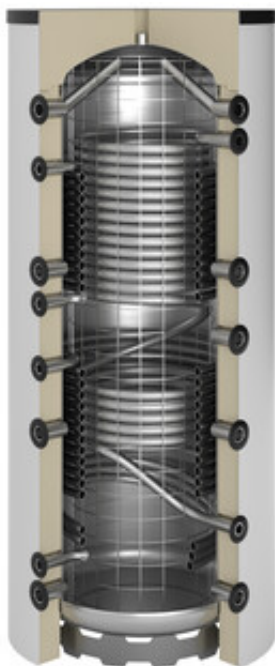

Fresh-water storage tank for highest demands on drinking water hygiene and energy efficiency.

The structure of the storage tank is fundamentally different from usual large-volume domestic hot-water tanks. A built-in corrugated stainless steel pipe separates the drinking water from the heating water, while serving as a powerful heat exchanger at the same time. Thus, the advantages of a buffer tank are combined with those of a continuous flow water heater. The heating water serves as actual heat storage while the drinking water flows through the corrugated stainless steel pipe only if required and, thus, a legionella-safe domestic water heating is ensured. You do not need a protection programme against legionella in the controller. At all times, the consumer is provided with hygienically clean, fresh water at the desired temperature.

Due to the two additional smooth-pipe heat exchangers, more heat generators can be integrated at any time and their energy can be fed into the fresh-water storage tank.

Data pursuant to EU regulation 814/2013

Name of supplier's trade marks:	OEG GmbH
Model identification of the supplier:	516008132 - Fresh-Water storage tank 1,000 litres with 2 smooth pipe heat exchangers
Heat retaining losses in watts:	55
Storage tank volume in litres:	985

General

OEG Nr.:	516008132
Rated volume according to EN 12897:	1000
Colour:	white
Insulation according to DIN 4102-1 Fire Protection Class B2:	removable segment insulation
Weight [kg]:	355
Total height including insulation [mm]:	2350
Diameter without insulation [mm]:	790
Diameter with insulation [mm]:	1015
Tilt height [mm]:	2280

Energy

Heat retaining loss according to EN 12897 [W]:	55
Heat losses in stand-by mode according to DIN 12897 [kW/h / 24 h]:	1,320
Output capacity (45°C) [l]:	571
Performance indicator NL following DIN 4708:	6,40

Pure+ Fresh-Water storage tank 1,000 litres with 2 smooth pipe heat exchangers



Tank

Real volume according to EN 12897 [l]:	985
p _{max} Tank [bar]:	3
t _{max} Tank [°C]:	95
t _{min} Tank [°C]:	20

DHW heat exchanger

DHW heat exchanger area [m²]:	8
DHW heat exchanger volume [l]:	34,20
p _{max} DHW heat exchanger [bar]:	6
t _{max} DHW heat exchanger [°C]:	95

Smooth-pipe heat exchanger

Smooth-pipe heat exchanger [number]:	2
Smooth-pipe heat exchanger area bottom [m²]:	3,30
Smooth-pipe heat exchanger area top [m²]:	2,60
Smooth-pipe heat exchanger volume bottom:	21,30
Smooth-pipe heat exchanger volume top:	17
p _{max} Smooth-pipe heat exchanger [bar]:	10
t _{max} Smooth-pipe heat exchanger [°C]:	130

Connections

Connection layout:	90°
Connection sensor [Ø mm / terminal]:	6 mm
Connection cold / hot water:	Rp 1 1/4"
Connection heat generator [thread]:	Rp 1 1/2"
Connection heat exchanger [thread]:	Rp 1"
Connection heating element [thread]:	Rp 1 1/2"
Max. immersion depth of screw-in heater [mm]:	800