


Pure+ Built-under Fresh-Water storage Tank
400 horizontal 2 additional heat exchangers

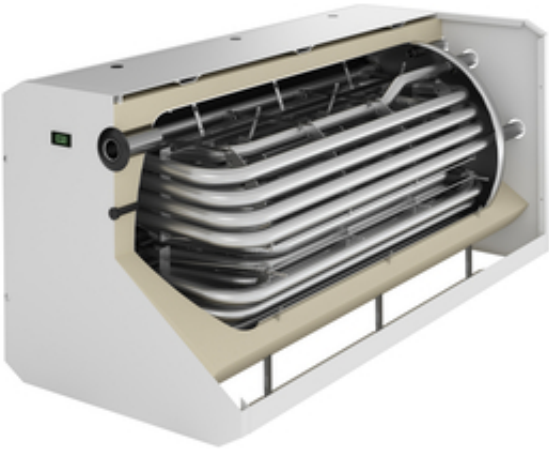

Fulfill your customers' highest demands on the hygiene of drinking water and efficiency - with the horizontal OEG built-under hygienic storage tanks!

The structure of these storage tanks is fundamentally different from usual large-volume domestic water tanks. A built-in corrugated stainless steel pipe separates the drinking water from the heating water and serves as a powerful heat exchanger at the same time. Thus, the advantages of a buffer tank are combined with those of flow heater.

The drinking water flows through the corrugated stainless steel pipe in the water of the heated tank only if required. This leads to a very low energy consumption, and you can guarantee your customers legionella-free drinking water. You will not need a legionella protection programme in the regulation. At all times, the consumer has hygienically-clean, fresh water at their desired temperature.

Due to the very solid, powder-coated steel sheet casing, the storage tank is particularly suitable as a built-under storage tank for all kinds of oil and gas condensing boilers of almost any manufacturer. The extremely sturdy construction allows loads up to 500 kg.

The horizontal arrangement of these hygienic storage tanks is ideal for the use in places that must be ruled out for vertical (standing) tanks (e.g. below inclined walls and stairs). Thus, your customers can benefit from the advantages of a hygienic storage tank even if space is limited.

Just compare! Due to the horizontal arrangement of the heat exchangers in the OEG hygienic storage tanks, you offer your customers advantage over other products in the market. Only due to the horizontal installation of the heat exchangers, an efficient thermal stratification is achieved. The generously dimensioned heat exchanger surfaces provide for another energetic advantage over other products available in the market.

Due to the two additional heat exchangers, you offer your customer the option to use more heat generators and to feed their energy into the hygienic storage tanks.

Data pursuant to EU regulation 812/2013

Name of supplier's trade marks:	OEG GmbH
Model identification of the supplier:	516006489 - Built-under Fresh-Water storage Tank 400 horizontal 2 additional heat exchangers
Energy efficiency class of the model:	A+
Heat retaining losses in watts:	41
Storage tank volume in litres:	452

Pure+ Built-under Fresh-Water storage Tank

400 horizontal 2 additional heat exchangers



General

OEG Nr.:	516006489
Rated volume according to EN 12897:	400
Colour:	white
Insulation according to DIN 4102-1 Fire Protection Class B2:	solid foamed insulation
Weight [kg]:	241
Total height including insulation [mm]:	830
Width [mm]:	780
Length [mm]:	1635

Energy

Energy efficiency class according to EU regulation no. 812/2013:	A+
Heat retaining loss according to EN 12897 [W]:	41
Heat losses in stand-by mode according to DIN 12897 [kW/h / 24 h]:	0,984
Output capacity (45°C) [l]:	230
Performance indicator NL following DIN 4708:	2

Tank

Real volume according to EN 12897 [l]:	452
p_{\max} Tank [bar]:	3
t_{\max} Tank [°C]:	95
t_{\min} Tank [°C]:	20

DHW heat exchanger

DHW heat exchanger area [m²]:	5,10
DHW heat exchanger volume [l]:	23
p_{\max} DHW heat exchanger [bar]:	6
t_{\max} DHW heat exchanger [°C]:	95
Zusatzwärmetauscher Fläche unten [m²]:	3
Zusatzwärmetauscher Fläche oben [m²]:	3
Zusatzwärmetauscher Volumen oben:	14
Zusatzwärmetauscher Volumen unten:	14

Zusatzwärmetauscher

p_{\max} Zusatzwärmetauscher [bar]:	6
t_{\max} Zusatzwärmetauscher [°C]:	95

Pure+ Built-under Fresh-Water storage Tank
400 horizontal 2 additional heat exchangers



Connections

Connection layout:	front/rear
Connection sensor [Ø mm / terminal]:	6 mm
Connection cold / hot water:	Rp 1 1/4"
Connection heat generator [thread]:	R 1"
Connection heating element [thread]:	Rp 1 1/2"
Max. immersion depth of screw-in heater [mm]:	1050